



C-band offset feed




C-Band Offset Feed is designed for using as part of C-band offset single dish antennas.

The phase center of C-Band Offset Feed is located at a distance of 20 mm from the horn aperture (inside).

KEY FEATURES:

- Working frequency range (WFR): 3.6-4.2 GHz
- Input VSWR in WFR: 1.01-1.25
- Polarization (by order): circular (left or right), linear
- Waveguide / flange type: WR-229 / UDR-40

Parameter	Value
Working frequency range (WFR), GHz	3.6-4.2
Input VSWR in WFR	1.01-1.25
Polarization (by order)	circular (left or right), linear
Waveguide / flange type	WR-229 / UDR-40

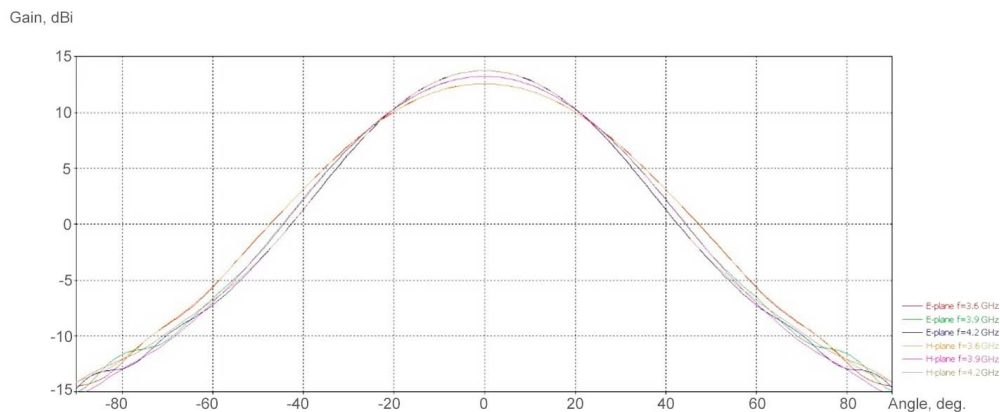

Taking into consideration that we (ROKS PrJSC) are developer and system integrator, also do not stop on our technical growth and improvement, know that view of all our devices and equipment including their technical parameters may be different from pictures presented on website and parameters listed on each device webpage.

Note! All details customer has to confirm in advance during ordering and before payment. Those parameters that were not specified and / or were not agreed while ordering will be implemented as basic at the discretion of the manufacturer. Each our customer has 1.5 year warranty and 7 year aftersales support for whole range of our products.